


2xOFI202-40MD6 (oil-less)

Voltage	V	230	230	3x400	3x400										
Frequency	Hz	50	60	50	60										
Motor	HP	4.00	4.00	4.00	4.00										
	kW	2.94	2.94	2.94	2.94										
Displacement	l/min	580	658	580	658										
	CFM	20.48	23.24	20.48	23.24										
FAD @ 8 bar/120 psi ¹⁾	l/min	260	292	260	292										
	CFM	9.20	10.30	9.20	10.30										
Max pressure ²⁾	bar	8	8	8	8										
	psi	120	120	120	120										
Max. current	A	16	18	10	10										
Tank size	litres	40	40	40	40										
	gallon	10.6	10.6	10.6	10.6										
Weight	kg	179	179	179	179										
	lbs	395	395	395	395										
Noise level	db(A)	63	66	63	66										
Thermal protection		Yes	Yes	Yes	Yes										
Duty cycle		100%	100%	100%	100%										

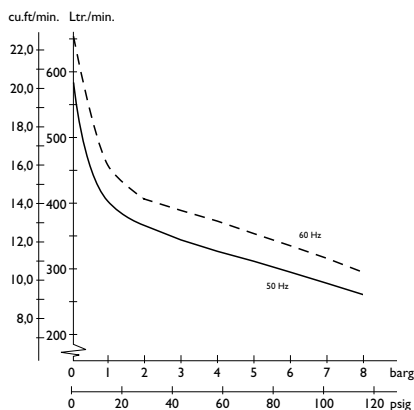

Dimensions (l x w x h)
661 x 774 x 856 mm / 26.0 x 30.5 x 33.7 inch

¹⁾ FAD is reduced by 18-20% on units with dryer.
Minimum pressure required to operate: 6 bar/90 psi

²⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR 

IDEX
IDEX CORPORATION

E-mail: info@jun-air.dk
Internet: www.jun-air.com

