


2xOFI 202-90BD6 (oil-less)

Voltage	V	200	200	230	240	3x400	3x440						
Frequency	Hz	50	60	50	60	50	60						
Motor	HP	4.00	4.00	4.00	4.00	4.00	4.00						
	kW	2.94	2.94	2.94	2.94	2.94	2.94						
Displacement	l/min	580	656	580	656	580	656						
	CFM	20.48	23.17	20.48	23.17	20.48	23.17						
FAD @ 8 bar ³⁾	l/min	260	292	260	292	260	292						
	CFM	9.18	10.31	9.18	10.31	9.18	10.31						
Max. pressure ¹⁾	bar	8	8	8	8	8	8						
	psi	120	120	120	120	120	120						
Max. current	A	-	-	16.0	18.0	10.0	10.0						
Tank size	litres	90	90	90	90	90	90						
	gallon	23,7	23,7	23,7	23,7	23,7	23,7						
Weight	kg	132	132	132	132	132	132						
	lbs	291	291	291	291	291	291						
Noise level	dB(A)/1m	79	78	79	78	79	78						
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes						
Duty cycle		100%	100%	100%	100%	100%	100%						

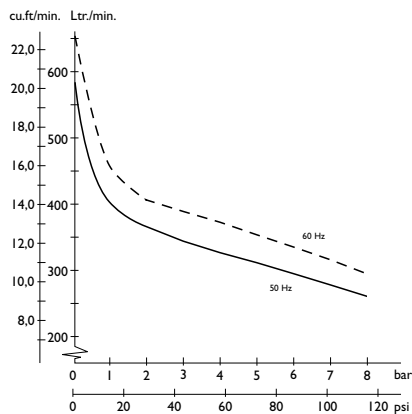

Dimensions (l x w x h)
1000 x 750 x 850 mm / 39.4 x 29.5 x 33.5

¹⁾ Higher pressure available upon request

³⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved

JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com

