


OF302-25MD2 (oil-less)

Voltage	V	100	100	120	200	200	230	230	3x400 ²⁾	3x440 ²⁾		
Frequency	Hz	50	60	60	50	60	50	60	50	60		
Motor	HP	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60		
	kW	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44		
Displacement ³⁾	l/min	108	138	138	108	138	108	138	108	138		
	CFM	3.81	4.87	4.87	3.81	4.87	3.81	4.87	3.81	4.87		
FAD @ 8 bar ³⁾	l/min	38	44	44	38	44	38	44	38	44		
	CFM	1.34	1.55	1.55	1.34	1.55	1.34	1.55	1.34	1.55		
Max. pressure	bar	8	8	8	8	8	8 ¹⁾	8 ¹⁾	8	8		
	psi	120	120	120	120	120	120 ¹⁾	120 ¹⁾	120	120		
Max. current	A	7.5	8.7	6.6	4.1	4.6	3.4	4.1	1.4	1.4		
Tank size	litres	25	25	25	25	25	25	25	25	25		
	gallon	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6		
Weight	kg	83	83	83	83	83	83	83	83	83		
	lbs	183	183	183	183	183	183	183	183	183		
Noise level	dB(A)/1m	47	48	48	47	48	47	48	47	48		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%		

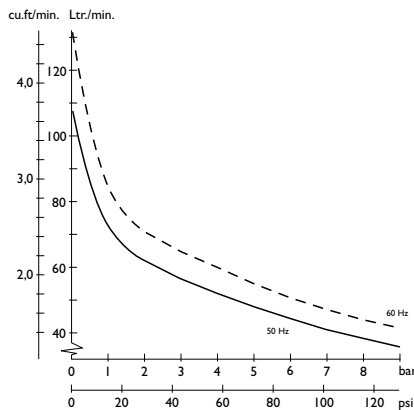

Dimensions (l x w x h)

711 x 452 x 856 mm / 28 x 17^{6/8} x 33^{6/8} inch

¹⁾ Available for operation at a maximum pressure of 10 bar / 145 psi upon request. Please note that operation at higher pressure will influence the lifetime.

²⁾ Neutral is required in installation

³⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved

JUN-AIR®

E-mail: info@jun-air.dk

Internet: www.jun-air.com

